

Figure 5
Contact Resistor + **End of Line Resistor (Parallel)** - Single Leaf Door Arrangement


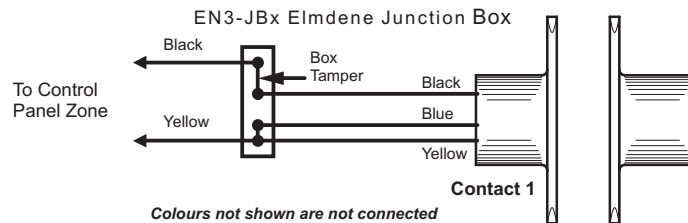


Figure 6
Contact Resistor + **End of Line Resistor (Parallel)** - Double Leaf Door Arrangement

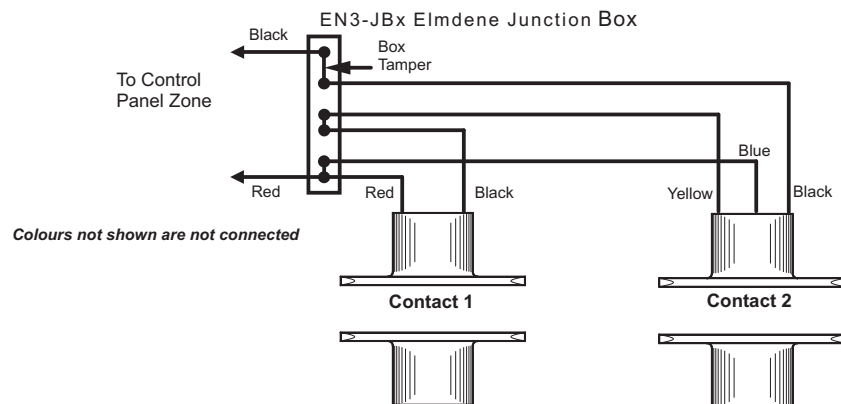

ELMDENE INTERNATIONAL LIMITED
RODNEY ROAD
FRATTON
PORTSMOUTH
PO4 8SS, UK

www.elmdene.co.uk

TEL: + 44 (0) 2392 739412 / FAX: + 44 (0) 2392 811631

Patent Pending



EN3-QFC Contact Wiring Guide

Product designed to meet the requirements of DD CLC/TS 50131-2-6:2004 **Grade 3** and Environmental **Class III**. Suitable for use in systems designed to comply with PD6662:2004 + A1+ A2

6 Wire Contact with built in resistors for use in Fully Supervised Loop or standard Double Pole systems, using Single or Multiple doors. See colour code chart below for matching Contact resistors to your Control Panel. This flush mounted magnetic contact is designed to meet the requirements of TS50131-2-6:2004 for immunity to the effects of an external interfering magnet when installed as shown overleaf.


Contact / Control Panel Colour Codes Spectrum Range

This table details the Contact colour coding system used to associate a Contact with the correct value resistors for your chosen Control Panel. The colour code is a suffix to the Contact product code. For example EN3-QFC-RD denotes a Red Contact with 4K7 and 2K2 resistors fitted. This table does NOT refer to WIRE colours; see Contact Wiring below for details of wire colours.

| Code | Colour | Resistor Values | Connection Mode | Control Panel |
|------|--------|-----------------|-----------------|--|
| RD | Red | 4k7 / 2k2 | Series | ADE, Bosch, Castle, Menvier, Pyronix, Scantronic, Texcom |
| GN | Green | 1k0 / 1k0 | Series | Honeywell |
| BL | Blue | 8k2 / 8k2 | Parallel | Guardall |
| GY | Grey | 4k7 / 4k7 | Series | Aritech, Pyronix |
| PU | Purple | 6k8 / 4k7 | Series | Guardtec |
| YL | Yellow | 2k2 / 2k2 | Series | Bosch, Europlex |

Note: DO NOT SHORTEN CABLE BEFORE READING THE FOLLOWING PARAGRAPH.

The contact wires have been colour coded using coloured sleeving. The core wires are not coloured inside the sheath. To shorten the overall cable length, strip the sheath using the rip cord and slide the sleeves down to the required length. Then cut the cable to the required length - ensuring the coloured sleeves remain on the core wires to enable easy installation.

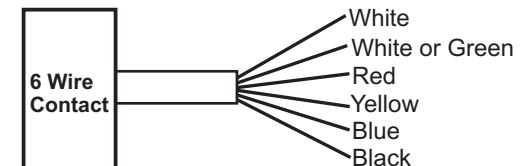


Contact can be used in the following formats:

- Standard double pole - Single and double leaf doors - Figures 1 & 2
- Fully supervised loop - Single leaf door - Series mode connection - Figure 3
- Fully supervised loop - Double leaf doors - Series mode connection - Figure 4
- Fully supervised loop - Single leaf door - Parallel mode connection - Figure 5
- Fully supervised loop - Double leaf doors - Parallel mode connection - Figure 6

Specifications

| Contact | | | Sensor Housing | Magnet Housing |
|----------------|---------------------------------|-------------------|----------------|----------------|
| Material | Rhodium | Material | Plastic - ABS | Plastic - ABS |
| Power Handling | 10VA | | | |
| Voltage Rating | 30Vdc | Flange Dimensions | 36.5 x 22.5mm | 36.5 x 22.5mm |
| Current Rating | 1.0A Max | Body Dimensions | Ø20.0 x 23.0mm | Ø20.0 x 27.0mm |
| Resistance | <300mohms | | | |
| Operating Life | >1 x 10 ⁸ operations | Mounting Screws | M3 | M3 |
| | | Fixing Dimensions | 28mm centres | 28mm centres |
| | | | | |
| | | IP Rating | IP 40 | IP 40 |
| | | Temperature Range | -10°C to +40°C | -10°C to +40°C |

Installation Notes

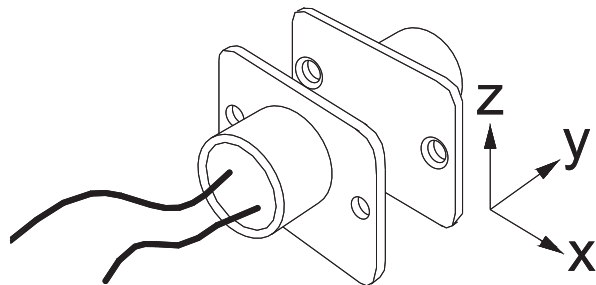

Switch mounted on
Non-Ferrous Surface
(e.g. Wood, PVC, Aluminum)

Operating Distances

| | | |
|-------|----------------|-----------------|
| Y | Min Close (mm) | 13 |
| | Max Open (mm) | 21 |
| +/- X | Min Close (mm) | 5 [#] |
| | Max Open (mm) | 13 [#] |
| Z | Min Close (mm) | 10 [#] |
| | Max Open (mm) | 18 [#] |

[#]At Y = 6mm

Figure 1

Standard **Double Pole** Wiring (No resistors) - Single Leaf Door Arrangement

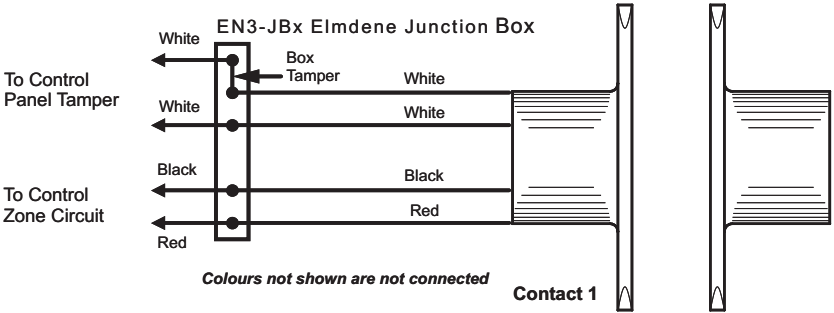


Figure 2

Standard **Double Pole** Wiring (No resistors) - Double Leaf Door Arrangement

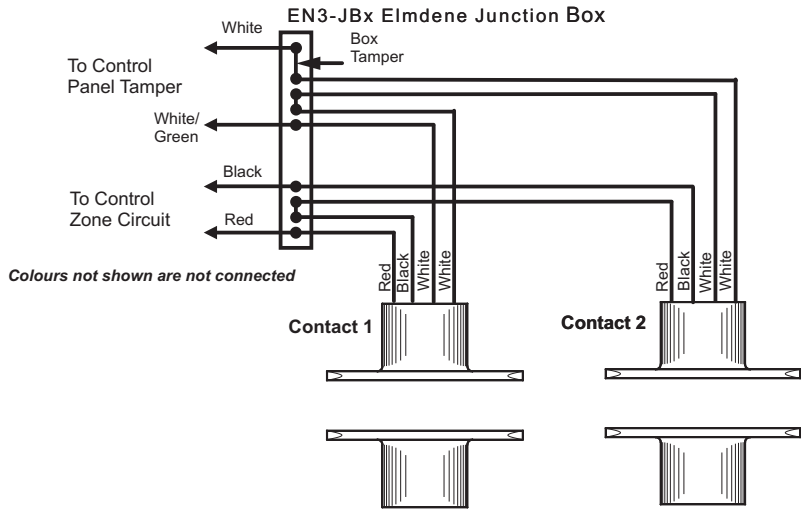


Figure 3

Contact Resistors + **End of Line Resistor (Series)** - Single Leaf Door Arrangement

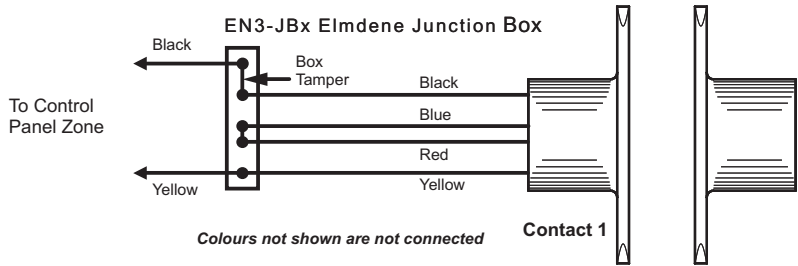


Figure 4

Contact Resistors + **End of Line Resistor (Series)** - Double Leaf Door Arrangement

