

1CH Passive HD Video Balun


8MP



DESCRIPTION:

The is passive and does not require power supply, namely plug and play, real-time stable HD CVI/TVI/AHD/ analog transmission results, and 450m matches passive transceivers. Mmatches's 600-year-old active transceiver is small enough to snap together, saving you a lot of time by simplifying your wiring.

Application Example:

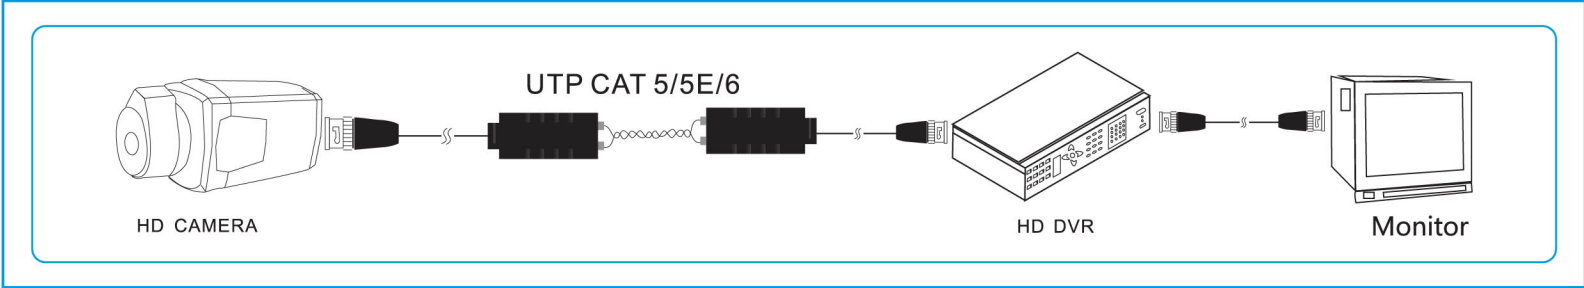

FEATURES:

- > No power required, simplified project wiring
- > Compatible with HDCVI/ HDTVI/ AHD
- > Transmission distance (over Cat 5E/6):
  - HDCVI 720P:400m/1080P:250m/4MP:200m/5MP:200m/8MP:200m;
  - HDTVI 720P/1080P:250m/4MP:200m/5MP:200m/8MP:200m;
  - AHD 720P:350m/1080P:200m/4MP:200m/5MP:200m/8MP:200m;
- > Plug and play, real-time transmit CCTV HD video signal, video is high quality and stable
- > Anti-interference, super lighting protection, ESD
- > ABS outer shell, convenient to use in intensive project
- > Stackable Design,Plug-and-play for real-time,transmission, easier for installatio

Item		Description
Properties	Video Port	1 channel
	Maximum Transmission Distance (with passive product)	HDCVI-720P:400m/1080P:250m/4MP:200M/5MP:200M;8MP:200m HDTVI-720P/1080P:250m;4MP:200M/5MP:200M;8MP:200m AHD-720P: 350m/1080P:200m/4MP:200M/5MP:200M;8MP:200m
	Category Type	UTP CAT5/5E/6
Video Transmission properties and port	Coaxial Video Port	Male BNC Port
	Twisted-pair Video Port	2-channel push terminal
	Video Compatibility	HDCVI/HDTVI/AHD, PAL/NTSC/SECAM Video
	Resolution	720P/1080P/4MP/5MP/8MP
	Anti-interference	>60dB
	Bandwidth	0• 75MHz
Protection	ESD	1a contact discharge electricity level 3
		1b air discharge electricity level 3
		Per:IEC61000-4-2
	Coaxial Port Protection	2KV Per: IEC61000-4-5
	Twisted-pair Port Protection	2KV Per: IEC61000-4-5
Impedance	BNC Male	75 ohms
	UTP Cable	100ohms
Physical Properties	Dimension(L*W*H)	36*19*16
	Out Shell	ABS
	Color	Black
	Weight	21.9g
Stability	MTBF	>10000H
Environment al	Working Temperature	-10• 55• •
	Storage Temperature	-20• -70• •
	Humidity	0• 95%