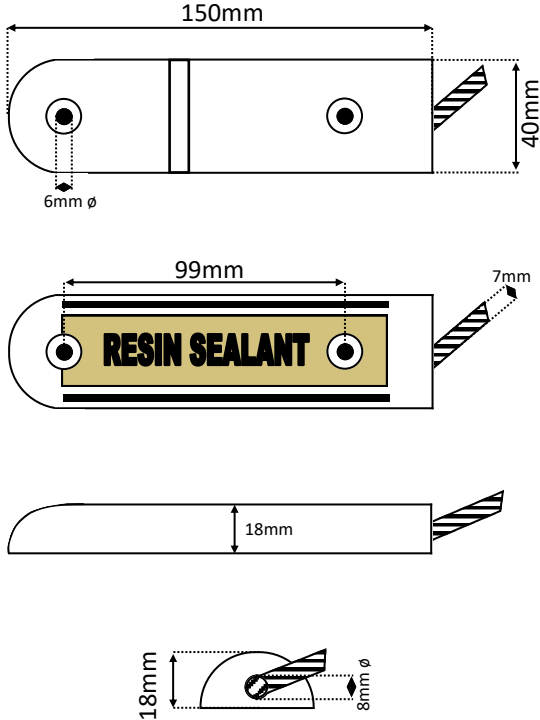

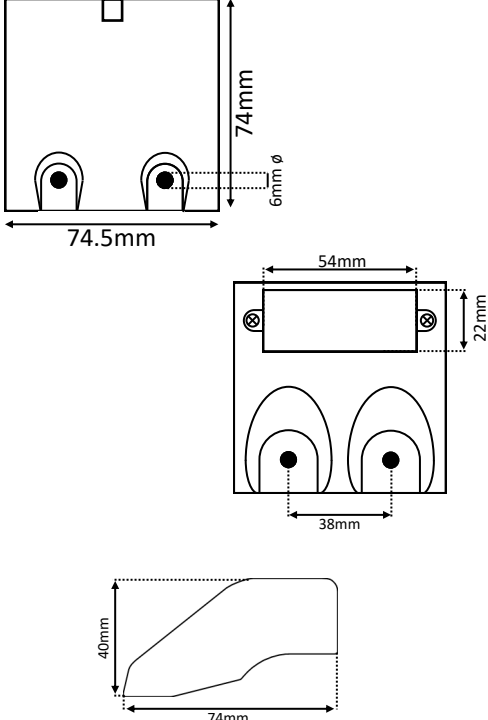





| | | | | | |
|--|--|---|--|---|---|
| <div>TOP</div> <div>BOTTOM</div> <div>LATERAL</div> <div>REAR END</div> <div>PHOTO</div> | <div>CONTACT</div> <div></div> <div></div> | <div>TOP</div> <div>BOTTOM</div> <div>LATERAL</div> | <div>MAGNET</div> <div></div> <div></div> | <div>DESCRIPTION</div> <p>Grade 2, Class III R/S contact 4 wire armoured cable prefitted. (Length by variant). Single reed, normally closed. (Complete circuit when magnet present).</p> <div>VARIANTS</div> <p>F10A 18" armoured fly lead F10C 1m armoured fly lead F10# #m armoured fly lead (eg—F105 = 5rm)</p> <div>ACTIVATION</div> <p>Reed switch, ~50mm operating gap.</p> <div>WIRING</div> <p>Red TAMPER LOOP White REED</p> <div>MATERIALS</div> <p>Anodised AA15 aluminium casting. Ferrite/Alnico V magnet. Rhodium reed. Stainless steel armour sleeving.</p> <div>TEMPERATURE RANGE</div> <p>-40 to +50 degrees Celsius.</p> <div>ELECTRICALLY RATED AS FOLLOWS</div> <p>500mA Max DC. 500mA Max AC.</p> <p>1 – 100v DC. 125v AC Max.</p> | |
| | <div><div>KNIGHT FIRE & SECURITY</div></div> <div>Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132</div> | | <div>Drawing #: F10 Drawn: Gareth Carpenter Date: 01/12/2022 Revision: 3</div> | | <div>All dimensions in mm Do not scale</div> <div></div> <div>© Knight Fire & Security Products Ltd All cases of infringement will be pursued.</div> |