

# Entry - Premium monitor

# System specifications

Power over Ethernet (PoE) Yes - IEEE 802.3af class 0

Ethernet bandwidth requirement 1Mb/s multicast per panel during call

Monitors per system  $\leq$  1000 TCP/IP ethernet extension limit 100m/328ft

Cable type CAT5

Current consumption 3.2 W (Average) 4.5 W (Max)

Call log events 100

#### Hardware features

Audio system Full Duplex

Screen Colour LED , capacitive

touch screen

Screen size 7", 16:9

Screen resolution 800 x 480

Camera Digital with IR filter

Door bell input 2 wire, 8v illumination

supported

LED status indicator RGB LED

Back lighting colour White

## Software features

Selectable ringtones Yes

Do Not Disturb function Yes

Call snapshot Yes

Built in help menu Yes

'View video' mode Yes

Concierge mode Yes

## Environment

Operating Temperature  $-0^{\circ}\text{C} - +49^{\circ}\text{C} +32^{\circ}\text{F} - +120^{\circ}\text{F}$ 

+321

Moisture resistance No Vandal Resistance Low


Yes

Backbox compatibility UK, Euro, USA

Accessories

Surface mount


Desktop stand Optional

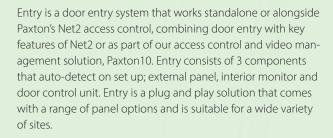


The Entry Premium Monitor comes either with or without a handset, and can be wall or desk mounted. Entry components simply interconnect using Cat5 or standard RJ45 terminated patch cables. Entry can also utilise existing network infrastructure for simple installation. PoE technology runs power and data along the same cable to avoid the need for separate power supplies. A visitor initiates a video call via the bell button on the external panel. Visitor access can be granted via the Entry Premium Monitor, which features an intuitive capacitive touchscreen user interface.



TDS-1064

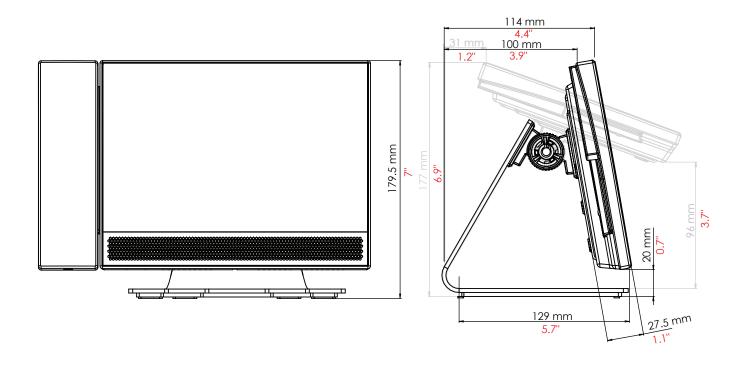

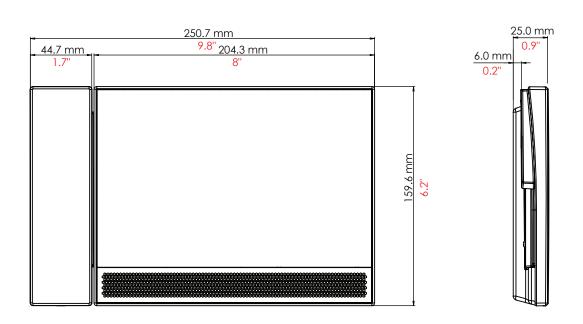

Entry Premium monitor -surface mount	337-290
Entry Premium monitor - surface mount with handset	337-292
Accessories	
Entry Premium monitor - desktop stand	337-294

